


### Specifications 规格

Nominal Voltage 额定电压	12V	
Rated Capacity(20 hour rate) 20小时率额定容量	26AH	
尺寸 Dimensions ± 1mm	Length 长	166mm(6.54")
	Width 宽	126mm(4.96")
	Height 高	175mm(6.89")
	Total Height (with terminals) 总高含端子	181mm(7.12")
Weight 重量	Approx.9.75kg(21.49lbs)	
Standard Terminal 标准端子	A2	

### 放电特性 Discharge Characteristics(20°C,68°F)

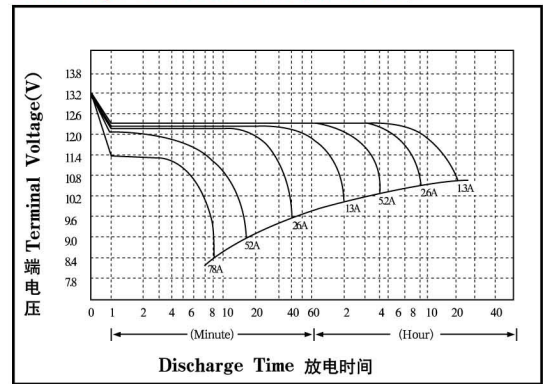

### Electrical Specifications 电性能

容量 Capacity 77°F(25°C)	20 hour rate (1.3A) 20小时率	26AH
	10 hour rate (2.42A) 10小时率	24.2AH
	5 hour rate (4.42A) 5小时率	22.1AH
	1 hour rate (15.6A) 1小时率	15.6AH
Internal Resistance 内阻	Fully charged battery 充足电 77°F(25°C)	13m Ω
Capacity 温度	104°F(40°C)	102%
Affected by 对容量	77°F(25°C)	100%
Temperature 影响	32°F(0°C)	85%
(20 hour rate) 20小时率	5°F(-15°C)	65%
自放电 Self-Discharge 77°F(25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge 充电 Constant (恒压) Voltage	循环使用: 首次充电电流低于7.80A 电压: 14.4-15.0V77°F(25°C) A 浮充使用: 电压13.5-13.8V77°F(25°C) Cycle:Initial Charging Current less than7.80A Voltage14.4-15.0V77°F(25°C) Standby: Voltage13.5-13.8V77°F(25°C)	

### 放电特性 Discharge Characteristics(0°C/32°F,40°C/104°F)

